





Colour Controlled Illumination from Anytronics

## IP65 RATED UPLIGHTER

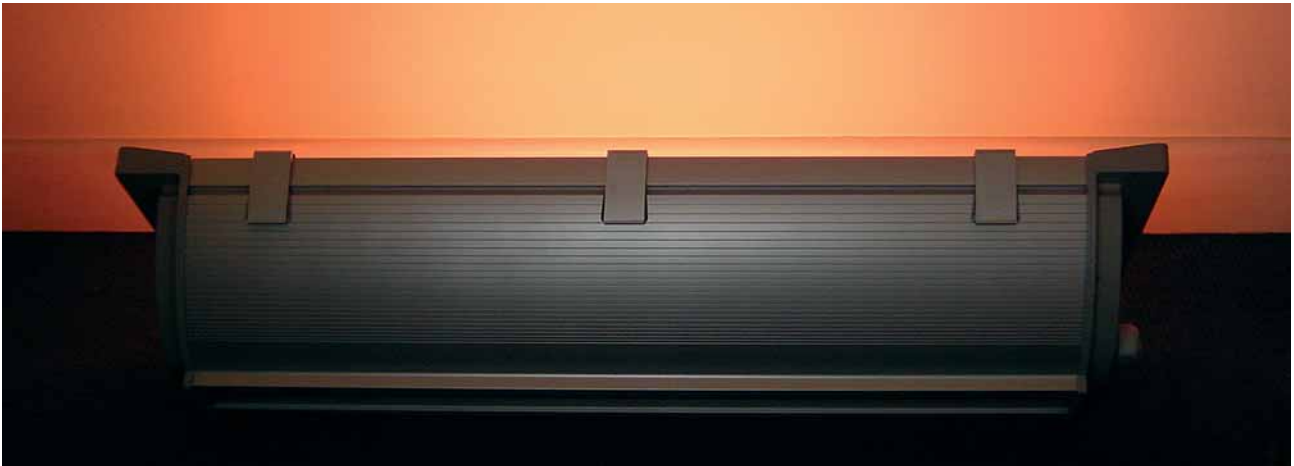

- IP65 Enclosure. Body material: anodised aluminium extrusion with cast aluminium end sections.
- Easy to access clear toughened glass front panel.
- RGBY interior / exterior uplighter / downlighter.
- Two models available:  
4 x 24 W T5 High Output. Length: 798 mm.  
4 x 54 W T5 High Output. Length: 1408 mm.
- Fully compatible with all Anycolour colour control products.
- Cost effective colour washing up/down internal /external walls.
- Digital Input HF electronic ballasts give average lamp life expectancy of 20,000+ hours.
- Simple adjustable bracket system for wall/ ceiling/soffit fitting.
- Easily cleaned exterior surfaces.
- Digitally coded input control signals work over >200 m range.
- Accessories: Deep dyed polycarbonate colour filters for long life colour stability are available to customise colour range. Red, Green, Blue, Yellow and Orange.

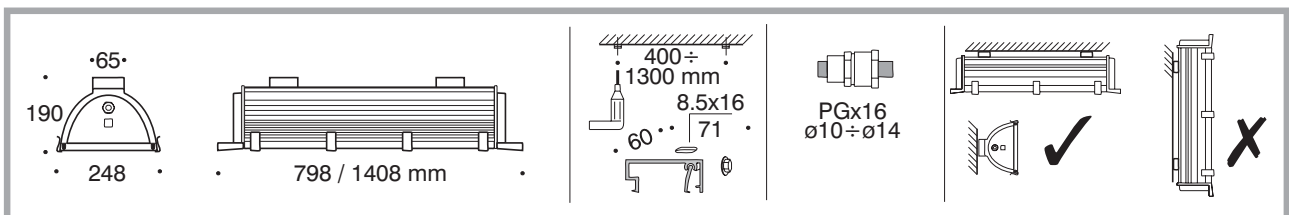

Further information available on our website [www.anycolour.com](http://www.anycolour.com)

Anytronics Limited, Units 5 & 6, Hillside Industrial Estate, London Road, Horndean, Hampshire, PO8 0BL

Tel: +44 (0)23 9259 9410 Fax: +44 (0)23 9259 8723 e-mail: [sales@anycolour.com](mailto:sales@anycolour.com)

© Anytronics Limited 2003. Anytronics and Anycolour are Registered Trademarks of Anytronics Limited. UK patents applied for. Anytronics reserve the right to change the specifications without notice at any time.

TV STUDIOS | THEATRE | SCHOOLS | CINEMA | ENTERTAINMENT | ARCHITECTURAL | OFFICES & RETAIL