



anylight

- easy to install
- simple to programme
- user friendly
- affordable

architectural lighting control made simple

www.anytronics.com


Anylight Dimming/Switching Packs + Interface

Anylight is the architectural dimming and control system from Anytronics for use in both domestic and commercial installations. The system offers remarkable control flexibility, whilst involving the minimum of installation and commissioning effort. System commissioning is achieved without the use of PC's or other sophisticated commissioning tools. Where necessary the system can be reprogrammed by the end user.

32 to 40 A Max.
Single phase supply through ports in top, side or base of unit.

DP1602CB 16 channel dimming/switching pack with Anylight Interface fitted

Mains Connections
Dimmed/switched supply to light fittings

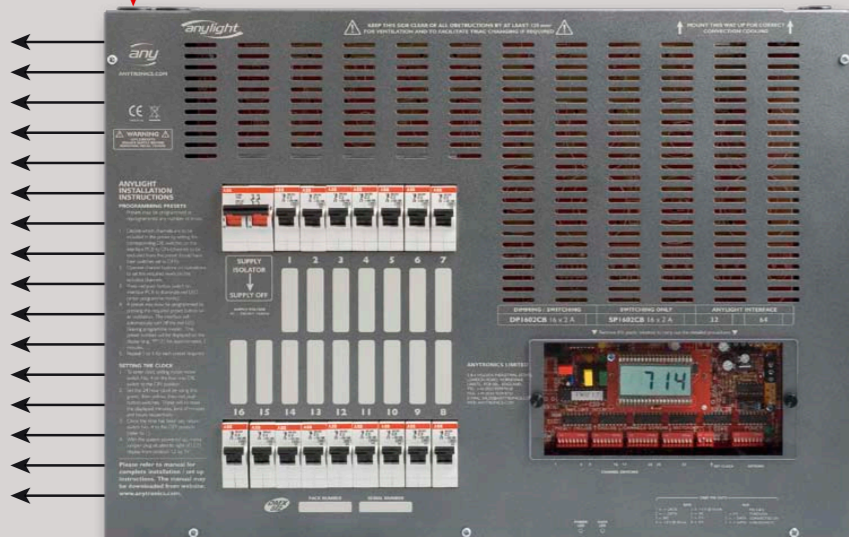


Data output to expansion packs via RJ45 (CAT 5)

4 channels of DSI or DALI Broadcast outputs via RJ12 socket for dimmable fluorescent lighting

Anylight Outstations & Control

All outstations communicate with the interface card in the master pack via a simple isolated two wire data connection. Up to 50 control outstations can be connected back to the master pack in this way. The range of control outstations available includes a wide range of manual touch panels, IR remote controls, contact closure inputs and PIR detector modules.

Two wire connection to outstations

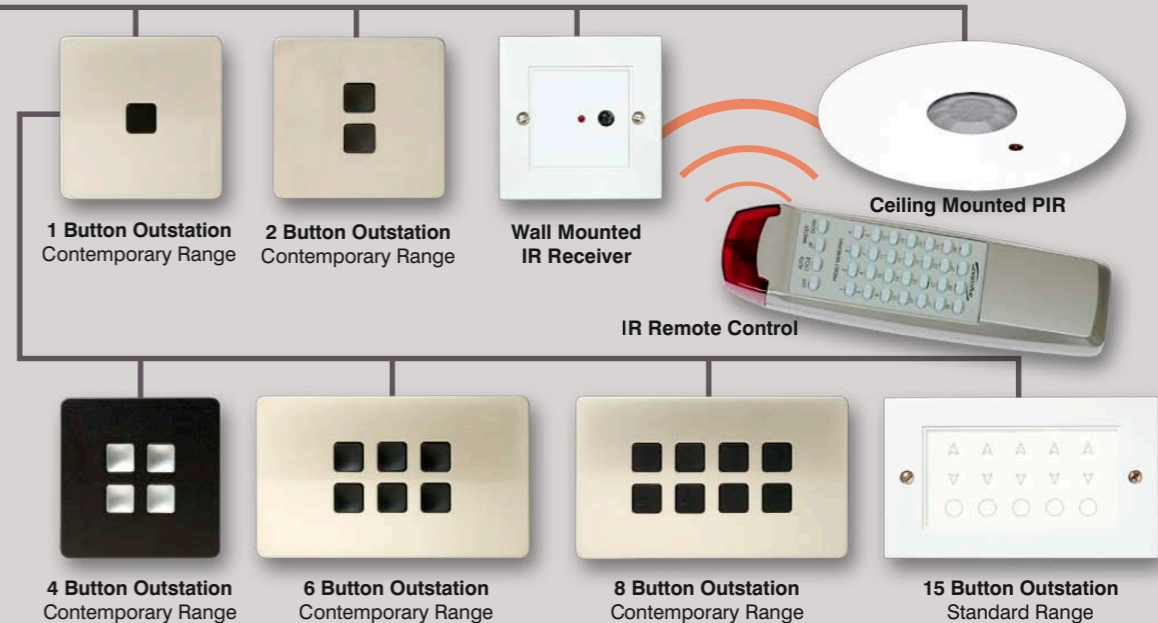


An extensive range of panel and button finishes are available - contact Anytronics for more details

Contemporary Range Single Patress Outstation Full Size Examples


ALC2C - 2 Channel Outstation

Finished in mark resistant brushed stainless with black concave buttons.

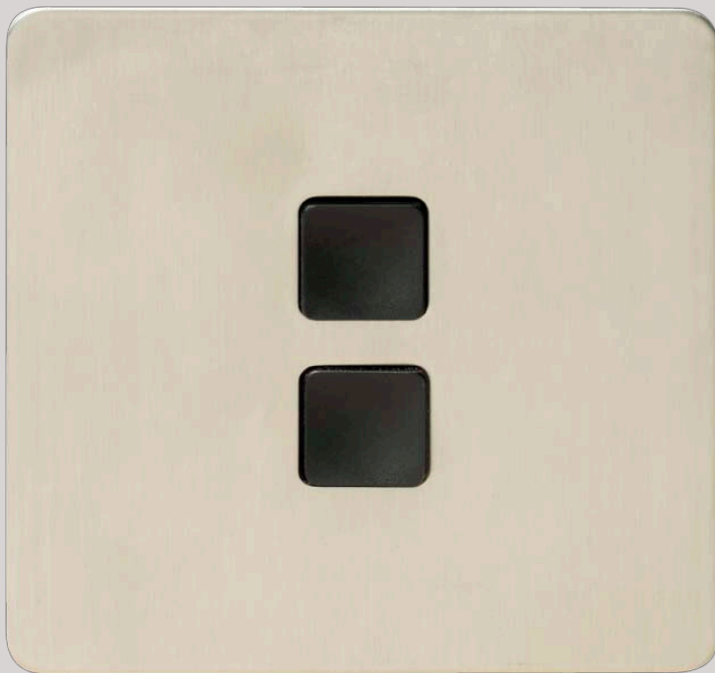

ALC4P - 4 Preset Channel Outstation

Finished in textured black with satin silver convex buttons.

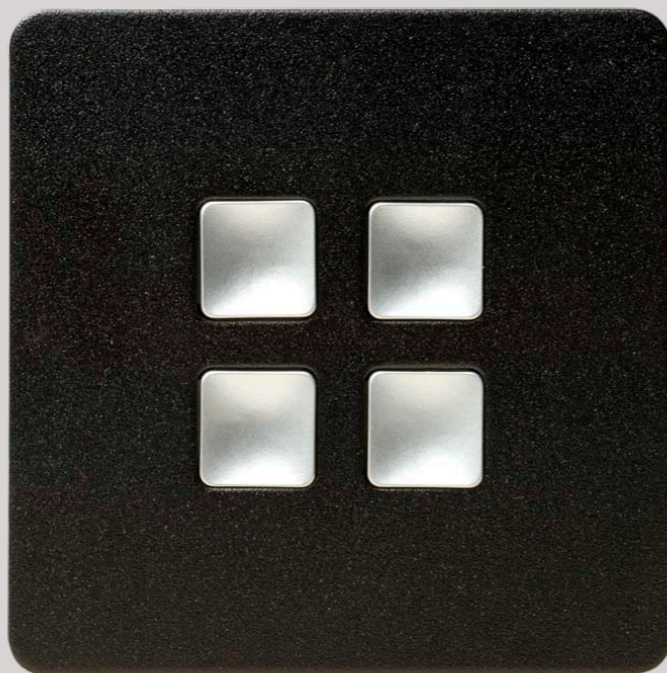


An extensive range of panel and button finishes are available - contact Anytronics for more details

Contemporary Range Double Patress Outstation Full Size Example

ALC4C4P - 4 Channel + 4 Preset Outstation

Finished in mark resistant brushed Stainless with black flat buttons for channel control and raised boss flat black buttons for preset control.

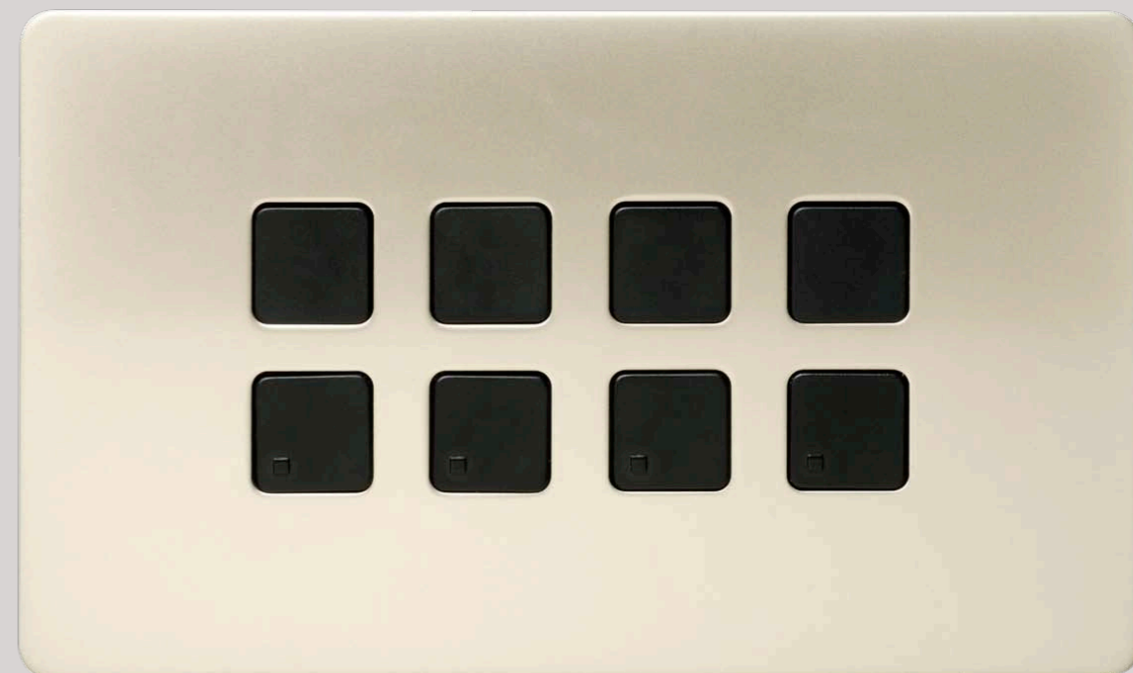

An extensive range of panel and button finishes are available - contact Anytronics for more details

Anylight Accessories



ALAFP

Normally used in conjunction with burglar alarm systems.



ALASP

Normally used with smoke/fire alarm systems.



AL006 - PIR Detector/Channel or Preset Control

Ceiling mounted unit integrates seamlessly into the Anylight system.




AL008C - Ceiling Mounted IR Receiver

Controls 8 channels + 24 presets or 8 presets + 24 channels




AL008 - Wall Mounted IR Receiver

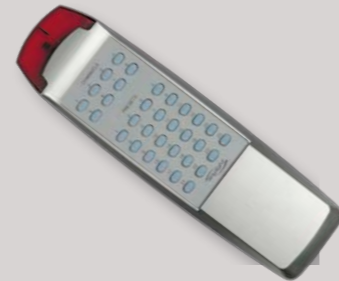

AL005 - IR Remote Control Handset


Can be used to programme OEM learning IR remotes.

Anylight Standard Outstation Range

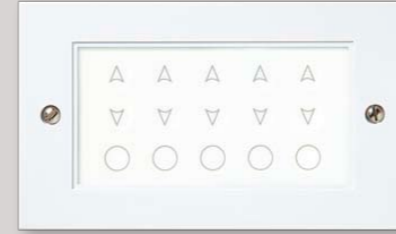


ALS5UD5P

5 channel + 5 preset Outstation.

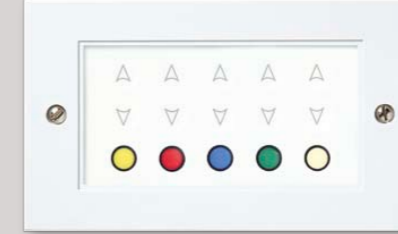

ALS5UD5P

5 channel + 5 preset Outstation with coloured preset buttons.

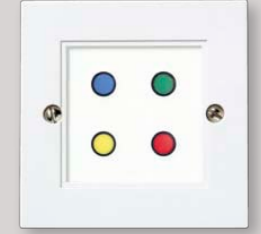


ALS4P

4 preset outstation with coloured preset buttons.




ALS2U2D

2 up/down channel outstation.



ALS4P

4 preset outstation.

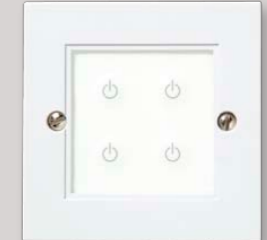


ALS4C

4 channel outstation.

Other surround finishes are available - contact Anytronics for more details

AL207 8 x 4 Amp Wall Mounted Dimming/Switching Pack

Mains 2 pole isolator and MCB channel protection, fitted with AL003 64 channel, 64 preset interface.

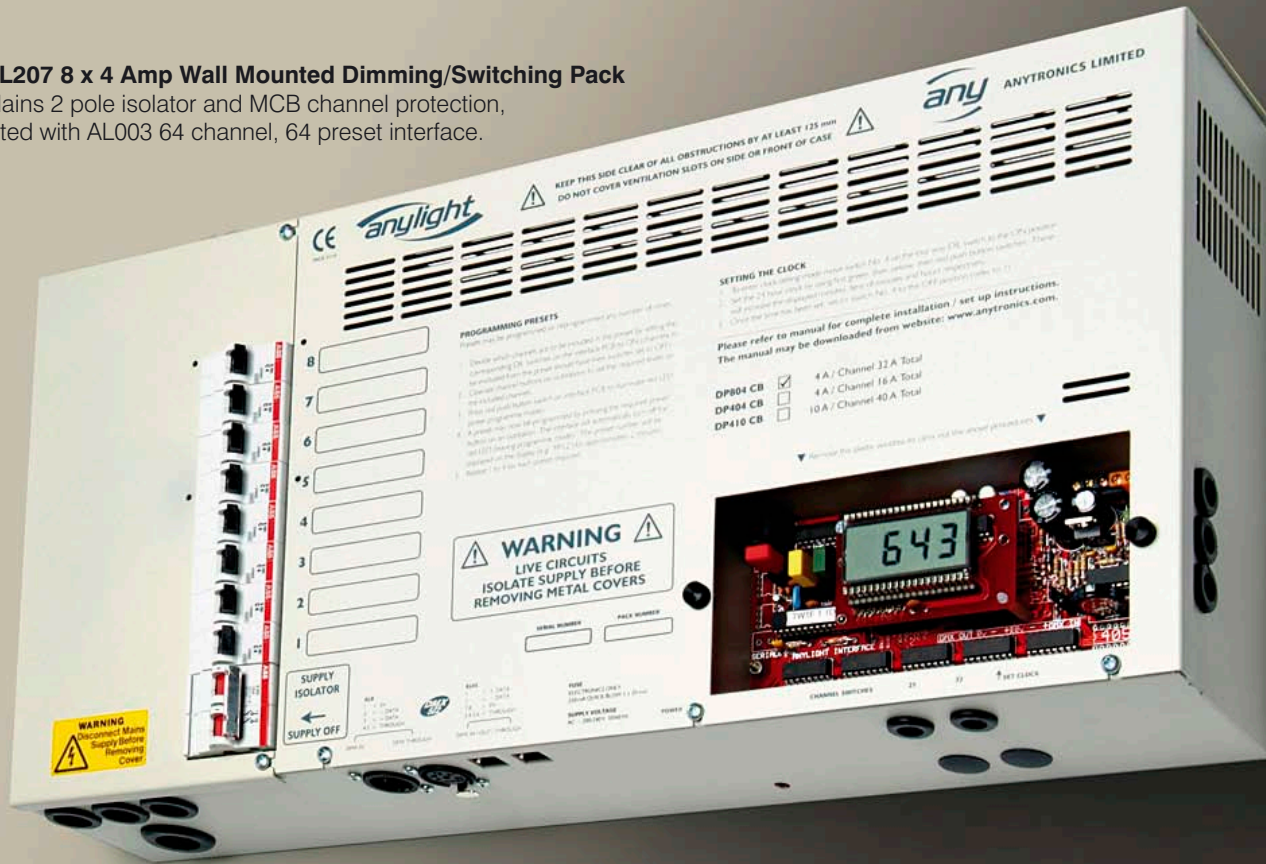

Anytronics Limited

Units 5 & 6, Hillside Industrial Estate, London Road, Horndean, Hampshire, PO8 0BL

Tel: +44 (0)23 9259 9410 Fax: +44 (0)23 9259 8723 sales@anytronics.com www.anytronics.com

Specifications and designs are subject to change without any notice or obligation on the part of the manufacturer.

T2310 0808 Issue 2

© 2008 Anytronics Ltd.